

Borough of Schuylkill Haven

Solar process information packet

The following must be filled out and returned to the Code enforcement Department before starting the project:

- Schuylkill Haven Building Permit application. *(filled out by customer/contractor).*
- Interconnection application for customer generation.
 - *All permit; Zoning review, Plan review, Engineering, UCC inspection fees, and net meter costs must be paid in advance of a permit being issued and the start of any work.*

Three sets of the following must be submitted with the above applications:

- Electrical diagrams/plan of purposed solar/generation project.
 - Interconnection, disconnect, disconnect location etc.
- Structural plans of the solar array.
 - Location, size, etc.
- Site plan of the property in which the array is to be installed.
 - Plot plan, structures, distance to property lines, etc.

Customer is responsible for the following fees:

- Schuylkill Haven Borough permit Fees and all applicable state fees.
- All Borough Electrical Engineering fees for inspection and review relating to the generation/solar project
- All borough/third party plan reviews, inspections.
- All zoning reviews, variances etc. related to the solar/generation project.
- The cost of the net meter supplied by the Borough.

Failure to submit any of the above documents and supply relevant information will be deemed as an incomplete application and result in denial of a permit.

Sincerely,

The Code Enforcement department

570-385-2841 office

m.paulin@schuylkillhaven.org

**Borough of
Schuylkill Haven**

12 W Main St Schuylkill Haven, Pa 17972
570-385-2841/ 570-385-1784 (fax)
m.paulin@schuylkillhaven.org

Interconnection Application for Customer Generation

Part 1

With terms and Conditions for Interconnection

(Application & Conditional Agreement – to be filled out prior to installation)

Customer Generator Contact Information

Legal Name and Mailing Address of Customer-Generator:

Name: _____
Mailing Address: _____
City: _____ State: _____ Zip Code _____
Contact Person (if other than above): _____
Mailing Address (if other than above): _____
Telephone (Daytime): _____ (Evening): _____
Facsimile Number: _____ E-Mail Address: _____

Alternate Contact information: (If different from Customer –Generator above

Name: _____
Mailing Address: _____
City: _____ State: _____ Zip Code _____
Contact Person (if other than above): _____
Mailing Address (if other than above): _____
Telephone (Daytime): _____ (Evening): _____
Facsimile Number: _____ E-Mail Address: _____

The Customer-Generator Facility's Information:

Facility Address: _____
City: _____ State: _____ Zip Code: _____
Electric Distribution Company: _____
Current Account #: _____ Current Meter #: _____
Current Annual Energy Consumption: _____ kWh Estimated in-service Date: _____
Inverter Type: _____

Energy Source (check one): _____ Wind _____ Photovoltaic

Manufacturer: _____

Number of Units: _____ Model Number of Inverter: _____

Inverter Rating: _____ kW ac Ampere Rating: _____ kW ac Number of Phases: _____

Voltage Rating: _____ V ac Dc Source Rating: _____ kW dc Nominal DC Voltage: _____

Power Factor: _____ % Frequency: _____ Hz

Certification (check one) _____ IEEE1547 _____ UL1741

Utility Accessible Disconnect or Lock Box: _____

One-Line Diagram Attached (Required): _____ Yes _____ No

Site Plan Attached (Required): _____ Yes _____ No

**Borough of
Schuylkill Haven**

12 W Main St Schuylkill Haven, Pa 17972
570-385-2841/ 570-385-1784 (fax)
m.paulin@schuylkillhaven.org

Interconnection Application for Customer Generation

Part 2

With terms and Conditions for Interconnection

(Final - Agreement – to be filled out prior to operation)
Certificate of Competition

Customer Generator Contact Information

Legal Name and Mailing Address of Customer-Generator:

Name: _____
Mailing Address: _____
City: _____ State: _____ Zip Code _____
Contact Person (if other than above): _____
Mailing Address (if other than above): _____
Telephone (Daytime): _____ (Evening): _____
Facsimile Number: _____ E-Mail Address: _____

Electrical Inspection:

The Customer-Generator Facility and interconnection system has been installed and inspected in compliance with the provisions of the National Electric Code and other applicable codes and standards as well as the local Building/Electrical Code of The Borough of Schuylkill Haven.

By: _____ Date: _____

Customer-Generator Signature:

The Customer –Generator Facility is complete and ready interconnected operation in accordance with all provisions of the Interconnection Application. The Customer-Generator acknowledges that it shall **NOT** operate the facility until receipt of Final Acceptance (below), or as otherwise provided for by regulation.

Signed: _____ Date: _____
Printed Name: _____ Title: _____

Final acceptance to interconnect Small Generator Facility:

(For use by Borough of Schuylkill Haven authorized Personal only)

The requirements for interconnection are complete and interconnection of the Customer-Generator Facility is accepted up on signature and return of this certificate of Completion by The Borough of Schuylkill Haven electric Department below:

Successful Witness Test Date: _____ Passed: (initials) _____

Schuylkill Haven Electric Department Signature: _____ Date: _____
Printed Name: _____ Title: _____

RESOLUTION NO. E-2
BOROUGH OF SCHUYLKILL HAVEN
SCHUYLKILL COUNTY PENNSYLVANIA

A RESOLUTION OF THE BOROUGH OF SCHUYLKILL HAVEN, SCHUYLKILL COUNTY, PENNSYLVANIA ESTABLISHING FEES AND SPECIFIC TECHNICAL REQUIREMENTS TO ACCOMMODATE CUSTOMER OWNED GENERATION OF ELECTRICITY.

WHEREAS, the Borough Council has approved Ordinance which amended the Borough Code of the Borough of Schuylkill Haven, Customer Owned Electric Generation, and;

WHEREAS, the Borough of Schuylkill Haven now desires to promulgate fees and specific technical requirements to accommodate Customer Owned Generation of Electricity,

NOW THEREFORE BE IT RESOLVED AND ENACTED BY THE BOROUGH OF SCHUYLKILL HAVEN, SCHUYLKILL COUNTY, PENNSYLVANIA, AND IT IS HEREBY RESOLVED AND ENACTED BY AND WITH THE AUTHORITY OF THE SAME AS FOLLOWS:

FEES

For all customer owned generation, the following fees shall apply.

Building Permit Fee	\$ Per Building Permit Schedule
Interconnection study fee:	At cost.
Electric permit inspection fee	\$ 15.00 per panel
Annual inspection fee:	\$ 100.00

Customer shall be responsible for costs of all system studies and upgrades, including metering, required to accommodate generation. Customer shall be responsible for annual system testing, witnessed by representatives of the Borough.

The fixed annual reconciliation period shall be set as June through May.

**BOROUGH OF SCHUYLKILL HAVEN
TECHNICAL REQUIREMENTS FOR CUSTOMER OWNED GENERATION**

General - The customer must be first in compliance with all applicable land use, zoning, planning, electric ordinance rules and regulations and the applicable tariff classification and rates. The terms and conditions contained herein are in addition to, but do not modify nor negate the terms of the Borough Code

I Purpose - The purpose of this document is to state the terms and conditions that govern the interconnection and operation of on-site distributed generation, in order to:

- A. Establish technical requirements which will promote the safe and reliable parallel operation of distributed generation resources;

- B. Enhance the reliability of electric service;
- C. Facilitate the implementation and use of distributed resources technologies;
- D. Enhance economic efficiency in the production and consumption of electricity and other energy; and
- E. Promote the use of distributed resources in order to provide electric system benefits during periods of capacity constraint.

II Applicability - Unless otherwise provided, these requirements apply to all customer generation interconnected and operated in the Borough of Schuylkill Haven power delivery system.

III Definitions

- A. Account - - An account is one metered or un-metered rate or service classification which normally has one electric delivery point of service. Each account shall have only one electric service supplier which shall be the Borough of Schuylkill Haven, providing full electric supply requirements for that account.
- B. Company - Borough of Schuylkill Haven (Hereinafter called Borough)
- C. Customer - Any adult person, partnership, association, corporation, or other entity: (i) in whose name a service account is listed, (ii) who occupies or is the ratepayer for a premises, building, structure, etc., and (iii) who is primarily responsible for payment of bills. A customer includes anyone taking Delivery Service or combined Electric Supply & Delivery Service from the Borough under one service classification for one account, premises or site. Multiple premises or sites under the same name are considered multiple Customers.
- D. Distributed Generation or On-Site Distributed Generation - An electrical generating unit which may be connected to the Borough electric system.
- E. Generator Owner - The owner of the generating system that is interconnected to the Borough electric system. Owner shall be a customer.
- F. Grid - The interconnected arrangement of lines and transformers that make up the Borough electric power system.
- G. IEEE Standard 929 - IEEE Standard entitled Recommended Practice for Utility Interface of Photovoltaic (PV) Systems, latest approved revision thereof.
- H. Interconnection - The physical connection of distributed generation to the Borough system in accordance with these requirements so that parallel operation can occur.
- I. Interconnection Application - The letter application which must be submitted by the Generation Owner to the Borough for permission to interconnect with the Borough system.

- J. Inverter - A static power converter with control, protection and filtering functions that converts Direct Current input to Alternating Current output. Inverters must be of the non-islanding type.
- K. Island - A portion of the utility system which contains both load and distributed generation and is isolated from the remainder of the utility system.
- L. Parallel Operation - Any electrical connection between the Borough system and the Generator Owner's generating source.
- M. Point of Common Coupling - The point where the electrical conductors of the Borough system are connected to the Customer's conductors and where any transfer of electric power between the Generator Owner and the Borough electric system takes place.
- N. Pre-Approved Equipment - Specific generating and protective equipment system or systems that have been approved by the Borough as meeting the applicable parts of this document.
- O. Pre-Interconnection Study - A study or studies which may be undertaken by the Borough in response to its receipt of a completed application for parallel operation with the Borough's system. Pre-Interconnection Studies may include, but are not limited to service studies, coordination studies and facilities impact studies. Applicant shall be responsible for all study costs.
- P. Qualifying Facility (QF) - An electric generation facility which is a qualifying facility under Subpart B, Section 201 of the Federal Energy Regulatory Commission's regulations per the Public Utility Regulatory Policies Act of 1978.
- Q. Stabilized - The Borough's system following a disturbance which returns to the normal range of voltage and frequency for at least 5 minutes or longer as coordinated with the Borough. The Borough may require a longer period upon a reasonable showing that the reconnection after 5 minutes will adversely affect the safety and reliability of the electric system.
- R. Unit - A distributed generation facility.
- S. Utility System or Electric Distribution Facility - Borough's distribution system operating to which the generation equipment is interconnected.

IV Interconnection Application - A proposed Generator Owner shall make a formal application to the Borough for the interconnection of a generator to the Borough system. The customer shall submit a letter to the Borough stating the technical aspects of the installation, two clean copies of equipment catalog cuts and two copies of a one line or riser diagram of the proposed installation and interconnection to the Borough system. Additionally, a representation by the customer that the installation will be constructed and operated in full compliance with the Borough requirements shall be included. For inverter installations, a statement that the inverter for the project is of the non-islanding type to prevent back feeds shall also be included.

V. Designation of Borough Contact Persons for Matters Relating to Distributed Generation Interconnection - The Borough Electric Department will be the designated point of contact for all matters related to interconnected generation. The Borough Electric Department will maintain records concerning applications received for interconnection and parallel operation of distributed generation. Such records will include the date of receipt of each such application, documents generated in the course of processing such applications, correspondence regarding such applications and the final disposition of such application.

VI. Pre-Interconnection Studies - The Borough reserves the right to conduct a service study, coordination study, or facilities impact study prior to approval of a distributed generation unit. In instances where such studies are deemed necessary, the scope of such studies shall be based on the characteristics of the particular distributed generation unit to be interconnected and the proposed point of interconnection.

Completion of Pre-interconnection Study - Upon completion of the interconnection study, the Borough will notify the Generator Owner that the application has been approved or indicate why the application cannot be approved.

VII Interconnection of Distributed Generation - Where generation is capable of exporting power to Borough system, the interconnection study may result in more stringent interconnection requirements.

VIII Pre-approval of Generation units, Devices and Systems - Upon approval by the Borough Manager or their designee that certain generating unit's protective devices and/or system(s) meet the standards set out in these requirements, such approval shall be made available to the appropriate manufacturer upon written request.

IX Connection Approval - The Generator Owner can connect their generation to the Borough system only after the Interconnection Application has been approved, the installation has been inspected by the Borough Manager or their designee, the system has been tested and the tests witnessed by the Borough, and the Generator Owner has received approval notification.

X Interconnected Generation Site Warning Label - The Generator Owner will install a warning label in a conspicuous place on their electric meter or meter box to notify the Borough personnel that there is a generator source installed on the load side of the meter. The warning label shall not be placed in a location that would interfere with the ability of Borough personnel to read the electric meter. The warning label must be placed before the generation can be interconnected.

XI Disconnection and Reconnection. - The Borough may disconnect a distributed generation unit under the following conditions:

- 1) Application Termination - Upon termination of the approved Interconnection Application.
- 2) Non Compliance - For non-compliance with the technical requirements specified in this document or other requirement contained in the Borough Code, provided

that the Borough has given notice to the Generator Owner and provided the Generator Owner reasonable time (consistent with the condition) to correct such non-compliance. The Borough will reconnect the unit only upon receipt of certification from the Generator Owner and verification by the Borough that the unit is in compliance. The Borough will provide verification within a reasonable time period.

- 3) In Case of a system emergency outage of the Borough Electrical Sources – The Generator Owner's generation equipment must be installed and configured so that parallel operation must automatically cease immediately and automatically during outages or loss of the Borough electric source in accordance with these requirements. The Generation Owner must also cease parallel operation upon notification by the Borough of a system emergency, abnormal condition or in cases where such operation is determined to be unsafe, interferes with the supply of service to other customers or interferes with the Borough's system maintenance or operation. In addition, the Borough may disconnect the generator from the system for system emergencies without notice.
- 4) For Routine Maintenance and Repairs – The Borough may disconnect a Customer/Generation Owner for routine maintenance and repairs on the Borough system.

XII Termination – The Generation Owner may terminate the approved Interconnection Application upon thirty (30) days written notice to the Borough. The Generator Owner must give the Borough notice that it intends to permanently shut down his generation.

XIII Privileged Communications Concerning Proposed Distributed Generation Projects – In the course of processing applications for parallel operation and in the conduct of pre-interconnection studies, the Generation Owner shall provide the Borough with detailed information concerning the proposed distributed generation project and note as privileged, on each applicable sheet and information considered privileged. If any submitted information is requested by a third party, notice shall be given by the Borough to the Generator Owner. It shall be the responsibility of the generation owner to legally challenge the release of this information.

XIV Technical Requirements for Parallel Operation of On-site Distributed Generation Units – This subsection describes minimum requirements and procedures for safe and effective connection and operation of distributed generation. A Generator Owner may operate 60 Hertz, three phase or single phase generating equipment, whether a QF or non-QF, in parallel with the Borough's system pursuant to an approved Interconnection application provided that the equipment and Generator Owner meet or exceed the requirements of these requirements and that the Borough has approved the Generator Owner's application to interconnect. This subsection describes typical interconnection requirements. Certain specific interconnection locations and conditions may require the installations of additional protective settings or hardware, especially when exporting power to the system. If the Borough, in the Borough's sole opinion, concludes that an application for parallel operation requires additional protective settings or hardware, the Borough shall make those requirements known after all pertinent studies are completed.

Approval to connect to the Borough system indicates only that the minimum Borough electrical requirements for a safe proper interconnection have been satisfied. Such

approval does not imply that the Generator Owner's facility meets all land use, zoning, planning or federal, state and local standards or regulations.

A) General Interconnection and Protection Requirements.

- 1) The Generator Owner's generation and interconnection installation must meet all Borough land use, zoning, planning and applicable national, state, and local construction and safety codes.
- 2) The Generator Owner's generator shall be equipped with protective hardware and software designed to prevent the generator from energizing the Borough's de-energized circuits. The Generator must automatically disconnect from the Borough's system if the Grid source is lost, irrespectively of connected loads or other generators.
- 3) The generator shall be equipped with the necessary protective hardware and software designed to prevent sustained parallel operation of the generating equipment with the Borough system unless the system service voltage and frequency are within acceptable magnitudes.
- 4) Pre-approved equipment for the project site, approved by the Borough, shall be accepted as part of an interconnection proposal without the need to re-review the equipment itself. However, the application, design and setting of pre-approved units and/or equipment must be reviewed and coordinated according to the unique needs of the specific location of the proposed installation.
- 5) The Generator Owner will be responsible for protecting its own generating and interconnection equipment in such a manner so that Borough system outages, short circuits, single phasing conditions or other disturbances including zero sequence currents and ferroresonant over-voltages do not damage the Generator Owner's generating equipment. The protective equipment shall also prevent excessive or unnecessary tripping that would adversely affect the Borough's service reliability to other Generator Owners and Customers.
- 6) The generator and interface protection schemes shall be continuously monitored and functioning and the generator shall immediately disconnect from the Borough's system for any condition that would make the protection scheme inoperable.
- 7) The operating power required for the protection and control schemes for the generator and the control power used to disconnect the generator from the Borough must not be dependent on local Borough power.
- 8) Where multiple generators are connected to the system through a single point of common coupling, the sum of the ratings of the generators will be used to

determine the applicability of these requirements. Protection scheme performance with one or more units off line will be considered.

- 9) Applicable circuit breakers or other interrupting devices at the Generator Owner's facility must be capable of interrupting the maximum available fault current at the site, including any contribution from the Owner's generator(s).
- 10) The Generator Owner will furnish and install a manual disconnect device which, when opened, will have the effect of isolating the generator from the Borough's system. The disconnect device shall have a visual break (a disconnect switch, a draw-out breaker, fuse block, etc. as appropriate to the voltage level), and shall be mounted on the exterior of the building accessible to the Borough's personnel at all times, and shall be capable of being locked in the open position via a Borough padlock. The Borough shall use reasonable efforts to utilize padlocks of a size consistent with typical manufacture's specifications. The Generator Owner shall follow the Borough's switching, clearance and tagging procedures.
- 11) The design, procurement, installation, and maintenance of the equipment at the Generator Owner's site is the responsibility of the Generator Owner and at the Generator Owner's expense.
- 12) Any necessary enhancements or improvements needed within the Borough's system and/or at the Customer sites to accommodate the parallel interconnection of the Generator Owner's generation will be at the Generator Owner's expense.
- 13) The Generator Owner has full responsibility and liability for the safe and proper operation of their equipment and the power originating from their generator. The Generator Owner is also responsible for synchronizing their generator(s) with the Borough's system and maintaining a synchronous operation.
- 14) The Generator Owner must immediately cease parallel operation upon notification by the Borough if such operation is determined to be unsafe, interferes with the supply of service to other customers, or interferes with the Borough's system maintenance or operation.
- 15) The Borough reserves the right to specify the type of transformer connection that will be employed for all multiphase interface transformers consistent, where reasonable, with the Generator Owner's power system.

B) Prevention of Generator Owner Generation Interference with the Borough System. To eliminate undesirable interference caused by operation of the Generator Owner's generating equipment, the Generator Owner's generator shall meet the following criteria:

- 1) Voltage - The generating equipment will be operated in such a manner that the voltage levels on the Borough's system are in the same range as if the generating equipment were not connected to the Borough's system. The Generator Owner shall provide an automatic method of initiating a disconnect sequence of his generating equipment from the Borough system with set points noted in the table below.

Generating Systems with	Non-Inverter or Rotating
-------------------------	--------------------------

Inverters Up to 5KW	Machine Generating Systems
<ul style="list-style-type: none"> • Trip in 0.1 second for $V < 50\%$ • Trip in 2 second for $50\% \leq V < 88\%$ • Trip in 2 seconds for $106\% < V < 137\%$ • Trip in 0.03 second for $137\% \leq V$ <p>(Above times and voltages taken directly from IEEE 929)</p>	<ul style="list-style-type: none"> • Trip in 0.1 second for $V \geq 115\%$ • Trip within 0.1 to 30 seconds for $V > 110\%$ or $V < 90\%$ <p>(Specific voltage and time delay set points will be determined for each installation.)</p>

Note: Trip time refers to the time between when the abnormal voltage condition occurs and the generator being disconnected from the Borough system.

On three phase generator installations, full three phase voltage sensing shall be employed. Voltages must be sensed on the high side of any interface transformer if the transformer high voltage winding is ungrounded.

The Generator Owner may reconnect to the grid when the system voltage returns to normal range and is stabilized as defined in Section III, Definitions.

- 2) Flicker – The Generator equipment or operation of equipment shall not cause voltage flicker on the Borough's system or to any other Borough customer. This flicker shall not exceed the "Borderline of Irritation" curve, as defined in IEEE Std 519-1992, Recommended Practices and Requirements for Harmonic Control in Electric Power Systems. Lower levels of flicker may be required in areas where equipment such as computers and instrumentation are impacted.
- 3) Frequency – The operating frequency of the generating equipment shall not deviate more than the values noted in the table below.

Generating Systems with Inverters Up to 5KW	Non-Inverter or Rotating Machine Generating Systems
<ul style="list-style-type: none"> • Trip in 0.1 second for $F < 59.3$ Hz • Trip in 0.1 second for $F > 60.5$ Hz. <p>(Set points taken from IEEE 929)</p>	<ul style="list-style-type: none"> • Trip in 0.1 second for $F < 59.3$ Hz • Trip in 0.1 second for $F > 60.5$ Hz. <p>(Other frequency and time delay set points may be necessary for a specific installation.)</p>

Note: Trip time refers to the time between when the abnormal frequency condition occurs and the generator being disconnected from Borough.

The Generator Owner may reconnect when the system frequency returns to normal range and is stabilized as defined in Section III, Definitions.

- 4) Harmonics – Non-linear circuit elements such as inverter can produce harmonics. Per IEEE std 519, Recommended Practices and Requirements for Harmonic Control in Electric Power Systems, the total harmonic distortion (THD) voltage shall not exceed 5% of the fundamental 60 Hz frequency nor 3% of the fundamental for any individual harmonic as measured at the location where the customer interfaces with the Borough's system (Point of Common Coupling). In addition, the level of harmonic current that the customer is allowed to inject into the Borough's system shall not exceed that specified in IEEE Std 519. Furthermore, any communication notch shall be limited as defined by IEEE Std 519. The preceding requirements apply to all types of generation systems.

The Generator Owner is responsible for the installation of any necessary controls or hardware to limit the voltage and current harmonics generated by his equipment to defined levels.

- 5) Power Factor – The generator must not adversely impact the power factor of the Generator Owner site. Inverters shall be designed to operate close to unity power factor. The operating power factor of the generator shall be contained within the limits defined in the table below.

Generating Systems with Inverters Up to 5KW	Non-Inverter or Rotating Machine Generating Systems
0.985 Lagging or Leading when output exceeds 10% of inverter rating.	0.985 Lagging or Leading

However, to the extent that a Generator Owner's power factor at the Point of Common Coupling falls below 0.985 lagging, the Generator Owner must obtain, install and maintain, at his expense, corrective apparatus that compensates for the drop in power factor caused by the installation of the generator.

- 6) Current – In some cases, directional over-current protection may be required to limit fault current flowing onto the Grid in the event of a line fault. DC inverters that are incapable of producing fault current do not require directional over-current protection.

Inverter systems shall not inject DC current greater than 0.5% of rated inverter output in the AC interface point under either normal or abnormal conditions:

- 7) Fault and Line Clearing – The Generator Owner shall automatically disconnect from the Borough's system during electrical faults on the Borough's electrical system and upon loss of the Borough's electric source. The Generator Owner may reconnect when the system voltage and frequency return to normal range and is stabilized as defined in Section III, Definitions. Detection of the loss of the Borough's primary electric system, where the Generator Owner is operating in an island with other customer load, becomes increasingly difficult as the level of dispersed generation on a feeder approaches the connected load. The over/under voltage and over/under frequency settings described previously along with the anti-islanding provisions of IEEE 929/UL 1746 inverters, shall be sufficient to satisfy this provision.
- 8) Automatic Reclosing – The Generator Owner is responsible for protecting his equipment from the effects of switching or automatic reclosing of the Borough's feeder circuits.

C) Control, Protection and Safety Equipment Requirements Specific to Generators of 5 KW or less.

All Generator Owners 5 KW or less can be single phase. The following table describes necessary control, protection and safety equipment specific to generator of 5 KW or less connected to Secondary or Primary Voltage Systems:

Control, Protection and Safety Equipment for Generators of 5 KW¹
or Less Connected to Secondary System

Generator Size 5 KW or less

Generator Disconnect Device

Over-Current Trip

Over-Voltage Trip

Under Voltage Trip

Over/Under Frequency Trip

Synchronizing Check

Manual or Automatic

Notes:

1. Exporting to the Borough system many require additional operational/protection devices.
2. For synchronous and other type of generators with stand-alone capability.

D) Requirements Specific to Generators paralleling for 0.1 second or less (Closed Transition Switching)

The table below shows the protective functions required by this requirement for generators which parallel with the Borough's system for 0.1 second or less such as during source or load transfers.

Control, Protection and Safety Equipment
Generators Connected to Secondary or primary System Voltage

For 0.1 Second or Less
(Closed Transition Switching)

Generator Size
Up to 5 KW

Over-Voltage Trip	
Under Voltage Trip	
Synchronizing Check ¹	Manual or Automatic
Excessive Closed Time Trip ²	

Notes:

1. For synchronous and other types of generators with stand-alone capability.
2. Scheme will trip generator if closed transition parallel mode remains in effect longer than 0.1 second.

E) Inverter Type – DC Generation installations using inverters for interconnection with the Borough must use non-islanding type inverters as defined in IEEE 929, IEEE Recommended Practices for Utility Interface of Photovoltaic (PV) Systems (including Annex B, D, E & G) and UL Subject 1741, May 1999, Standard for Static Inverters and Charge Controllers for use in Photovoltaic Power Systems.

F) Inspection and Start-Up Testing – the Generator Owner shall provide the Borough with reasonable prior notice at least 3 weeks before the initial energizing and start-up testing of the Generator Owner's generating equipment and the Borough, at its discretion, shall witness the testing of any equipment and protective systems associated with the interconnection. The Generator Owner shall revise and re-submit the application information for any proposed modification that may affect the safe and reliable operation of the Borough's system. The generator may be reconnected to the Borough's system only after the modified application has been reviewed, testing has been confirmed and the Borough has given approval to reconnect.

- G) Site Testing and Commissioning - Testing of protection systems shall include procedures to functionally test all protective elements of the installation up to and including tripping of the generator and interconnection point. Testing and testing intervals shall be in accordance with manufacturers' and industry recommendations. Testing shall verify all protective set points and relay/breaker trip timing. The Borough, at its discretion, may witness the testing of installed switchgear, protection systems, and generator. The Generator Owner is responsible for all maintenance of the generator, control and protective equipment. The Generator Owner will maintain records of such maintenance activities which the Borough may review at reasonable times. Annual inspection of each generator installation shall be required at the discretion of the Borough.
- H) Revenue Metering - Revenue metering requirements will be reviewed on each specific installation. A single net revenue meter shall be installed. The customer shall be responsible for all costs associated with the Borough revenue metering.
- I) Dedicated Transformer - A dedicated transformer or other current-limiting device shall be required for any type of generator installation where the increase in available short circuit current could adversely impact other Borough customers on the same secondary circuit.
- J) Applicable Standards

All equipment and installations, and specifically generation installations, shall meet all requirements, including but not limited to safety and performance, of the current edition of the National Electrical Code, applicable Institute of Electrical and Electronic Engineers' (IEEE) standards, Underwriters Laboratories, Borough's specific requirements, UL 1741 and IEEE 1547.

This resolution will be effective as of the 4/20/11 billing cycle.

RESOLVED AND ENACTED INTO LAW, THIS 20th DAY OF April, 2011.

ATTEST:

SCHUYLKILL HAVEN BOROUGH COUNCIL

[Signature]
Borough Manager

[Signature: Martin W. Beyer]
President

[Signature]
Mayor

BOROUGH OF SCHUYLKILL HAVEN
SCHUYLKILL COUNTY, PENNSYLVANIA

ORDINANCE NO. 1059

AN ORDINANCE OF THE BOROUGH OF SCHUYLKILL HAVEN TO
PROVIDE FOR CUSTOMER GENERATED ELECTRIC SERVICE

BE IT ENACTED AND ORDAINED by Council of the Borough of Schuylkill Haven, Schuylkill County, Pennsylvania, and it is hereby enacted and ordained by authority of the same as follows:

WHEREAS, in order to protect the health, safety, and welfare of the citizens of the Borough of Schuylkill Haven, Council has determined it necessary to regulate customer owned electric generation installation; and

WHEREAS, the Borough desires to encourage and require proper operation of customer owned generation installations; and

WHEREAS, the Borough desires to ensure the necessary compliance with the Borough Code.

NOW, THEREFORE, BE IT ENACTED AND ORDAINED by Council of the Borough of Schuylkill Haven, and it is hereby ordained and enacted that:

Customer Owned Generation

Customer generation may be installed to offset the amount of energy the customer purchases from the Borough, up to the annual capacity limits contained herein. Customer generation shall be subject to the requirements of the Borough. The installation shall comply with all applicable land use, zoning, planning, Borough Code rules and regulations, and the applicable electric classification and rates. Customer generation facilities shall be owned and operated by the customer.

The maximum size allowed for any customer generator system shall not exceed five (5) kilowatts. See Amendment # 1061

If the customer generates more energy than consumed during a monthly billing cycle, the customer shall receive an energy credit in kilowatt hours for the next billing month. Monthly credit shall be applicable to energy only. Excess energy credits at the end of a 12-month period established at the discretion of the Borough, shall be credited in dollars at fifty (50) percent of the average wholesale rate charged to the Borough by the Borough's power suppliers. This average wholesale rate shall be based upon the previous 12-month power supply cost of the Borough. Regardless of the in-service date of the installation, the 12-month period shall be set by the Borough. The customer shall be required to pay all applicable charges, including customer, capacity, tax, and the purchased power adjustment.

The customer generator operating an electric generating facility shall maintain homeowners, commercial, or other insurance providing coverage in the amount of at least One Million (\$1,000,000.00) Dollars for the liability of the insured against losses or damages arising from the use of the customer's electric generating facility. The Borough shall be named an additional insured. The customer must submit evidence of such insurance to the Borough before beginning to generate electricity. The Borough's receipt of evidence of liability insurance shall not imply an endorsement of the terms and conditions of the coverage.

Fees shall include Borough costs, including but not limited to an application fee, inspection fee, and annual inspection fee. Each fee shall be set by resolution of the Borough. Customer shall be responsible for costs of all system studies and upgrades, including metering, required to accommodate generation.

All customer owned generation shall be subject to the Borough of Schuylkill Haven Technical Requirements for Customer Owned Generation, as amended by resolution of the Borough.


ENACTED and ORDAINED into an Ordinance this 6th day of April, 2011, by Council of the Borough of Schuylkill Haven in lawful session duly assembled.

ATTEST:




Secretary

BOROUGH OF SCHUYLKILL HAVEN

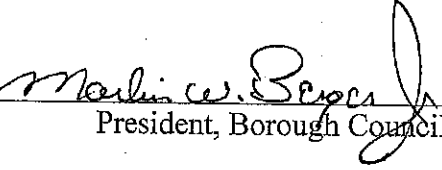By: 

President, Borough Council

APPROVED:

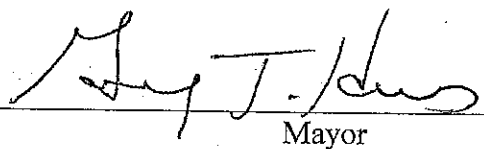

Mayor

BOROUGH OF SCHUYLKILL HAVEN
SCHUYLKILL COUNTY, PENNSYLVANIA

ORDINANCE NO. 1061

AN ORDINANCE OF THE BOROUGH OF SCHUYLKILL HAVEN
AMENDING ORDINANCE NO. 1059 TO PROVIDE FOR CUSTOMER
GENERATED ELECTRIC SERVICE

NOW, THEREFORE, BE IT ENACTED AND ORDAINED by Council of the Borough
of Schuylkill Haven, the following amendment thereto:


SECTION 1. The section of this Ordinance entitled Customer Owned Generation shall
be amended to read as follows:

“ . . . The maximum size allowed for any customer generator system shall not
exceed ten (10) kilowatts. . . .”

SECTION 2. The remaining sections of the Ordinance shall remain in full force and
effect.


THIS AMENDMENT ENACTED AND ORDAINED into an ordinance this 15th
day of June, 2011.

ATTEST:




Secretary

BOROUGH OF SCHUYLKILL HAVEN

By: 

President, Borough Council

APPROVED:

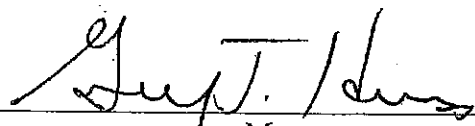

Mayor

BOROUGH OF SCHUYLKILL HAVEN
SCHUYLKILL COUNTY, PENNSYLVANIA

ORDINANCE NO. 1064

AN ORDINANCE OF THE BOROUGH OF SCHUYLKILL HAVEN
AMENDING ORDINANCE NO. 1059, WHICH PROVIDES FOR CUSTOMER
GENERATED ELECTRIC SERVICE

NOW, THEREFORE, BE IT ENACTED AND ORDAINED by Council of the Borough
of Schuylkill Haven, the following amendment thereto:

SECTION 1. The section of this Ordinance entitled Customer Owned Generation shall
be amended, in part, to read as follows:

“ . . .The customer generator operating an electric generating facility shall
maintain insurance coverage in the amount of at least One Million (\$1,000,000.00)
Dollars for the liability of the insured against losses or damages arising from the use of
the customer’s electric generating facility. The Borough shall be named as an additional
insured except where homeowner’s coverage is applicable. In such instances, the
customer agrees to indemnify and defend the Borough, its officers, agents, and
employees against any and all loss, cost, damage, injury, liability, and claims related to
the solar project. The customer must submit evidence of such insurance to the Borough
before beginning to generate electricity; within fifteen (15) days of each renewal thereof;
and within fifteen (15) days of any change of insurance providers. The Borough’s receipt
of evidence of liability insurance shall not imply an endorsement of the terms and
conditions of the coverage. . . .”

SECTION 2. The remaining sections of the Ordinance shall remain in full force and
effect.


THIS AMENDMENT ENACTED AND ORDAINED into an ordinance this 3rd
day of August, 2011.

ATTEST:




Secretary

BOROUGH OF SCHUYLKILL HAVEN

By: 

President, Borough Council

APPROVED:



Mayor