
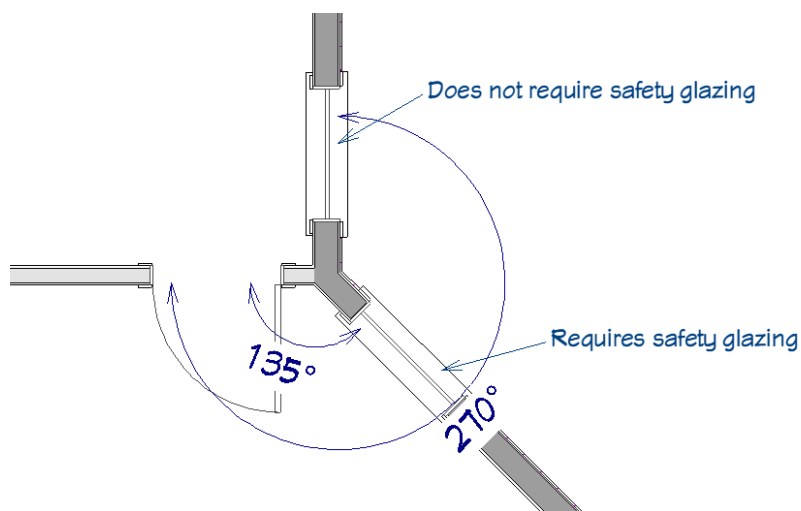


Adjacent to Doors | Safety Glazing

[R308.4.2 Glazing Adjacent to Doors](#) and [R308.4.1 Glazing in Doors](#). If any part of the glass pane is within the red zone safety glazing will be required.


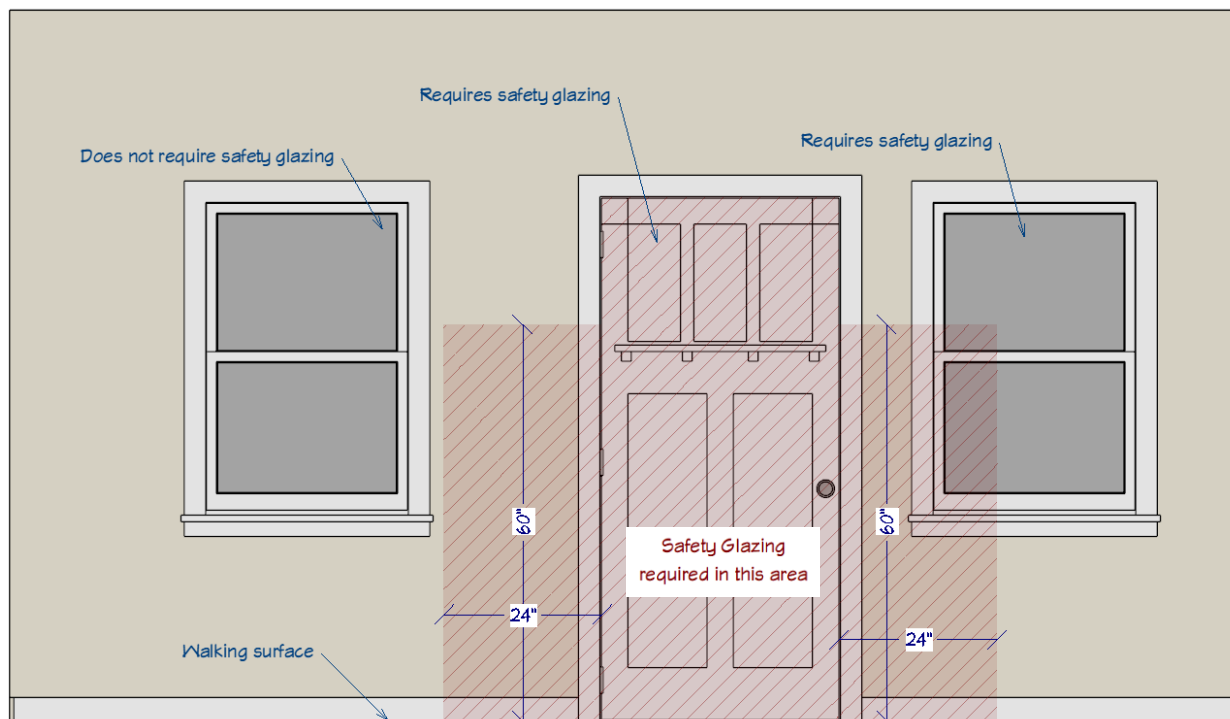


Exceptions

1. Decorative glazing.
2. Where there is an intervening wall or other permanent barrier between the door and the glazing.
3. Where access through the door is to a closet or storage area 3 feet (914 mm) or less in depth. Glazing in this application shall comply with Section R308.4.3.
4. Glazing that is adjacent to the fixed panel of patio doors.

Adjacent to Stairs | Safety Glazing

[R308.4.6 Glazing Adjacent to Stairs and Ramps](#) and [R308.4.7 Glazing Adjacent to the Bottom Stair Landing](#). If any part of the glass pane is within the red zone safety glazing will be required.

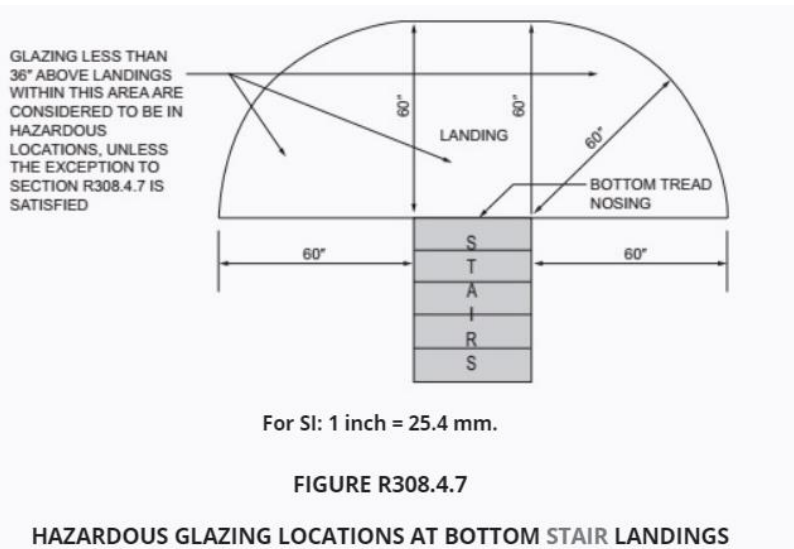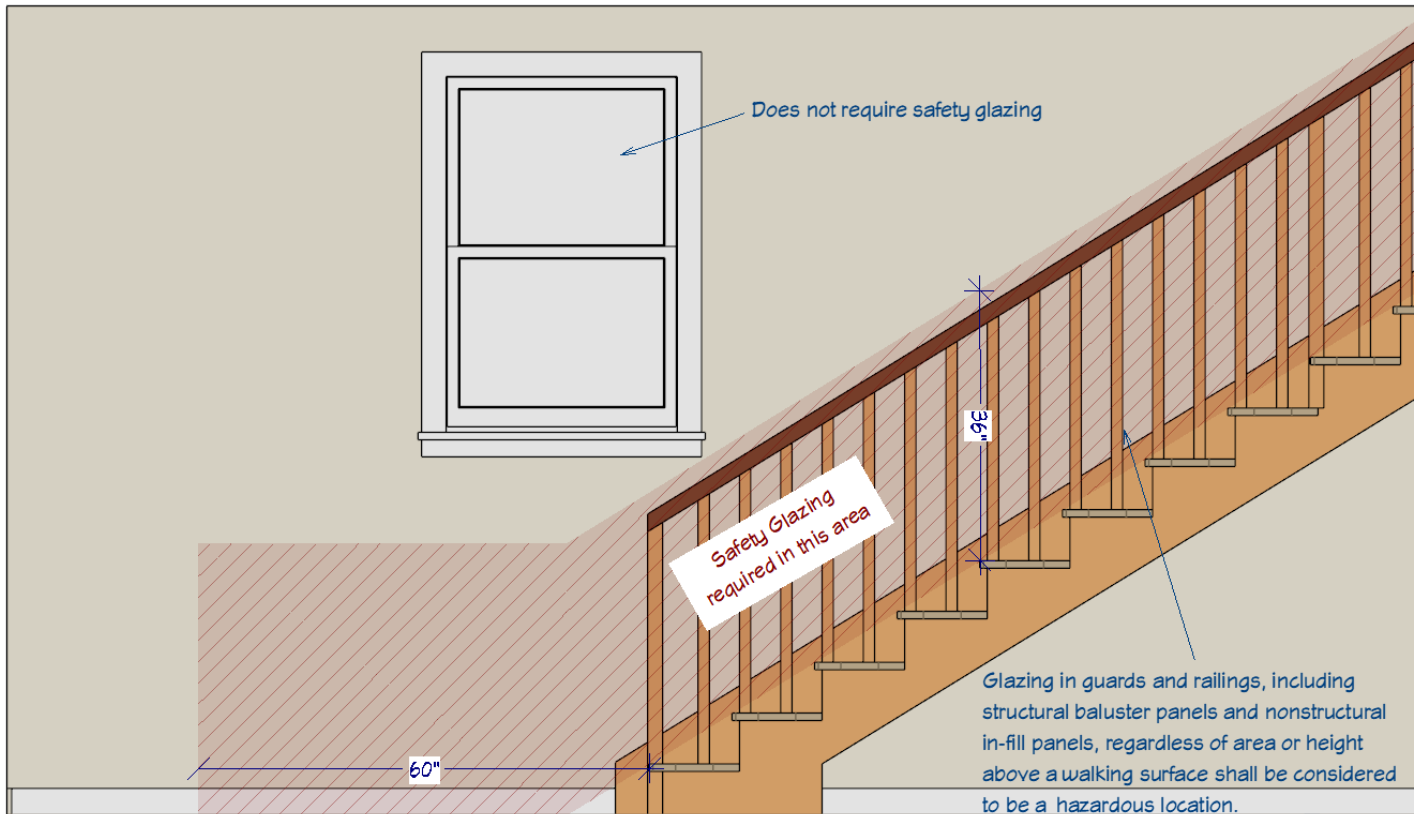


Exceptions

1. Where glazing is adjacent to a walking surface and a horizontal rail is installed at 34 to 38 inches (864 to 965 mm) above the walking surface. The rail shall be capable of withstanding a horizontal load of 50 pounds per linear foot (730 N/m) without contacting the glass and have a cross-sectional height of not less than 1 1/2 inches (38 mm).
2. Glazing 36 inches (914 mm) or more measured horizontally from the walking surface.

Close to Walking Surface | Safety Glazing

[R308.4.3 Glazing in Windows](#). If all the conditions outlined in the image below are true, then safety glazing will be required.

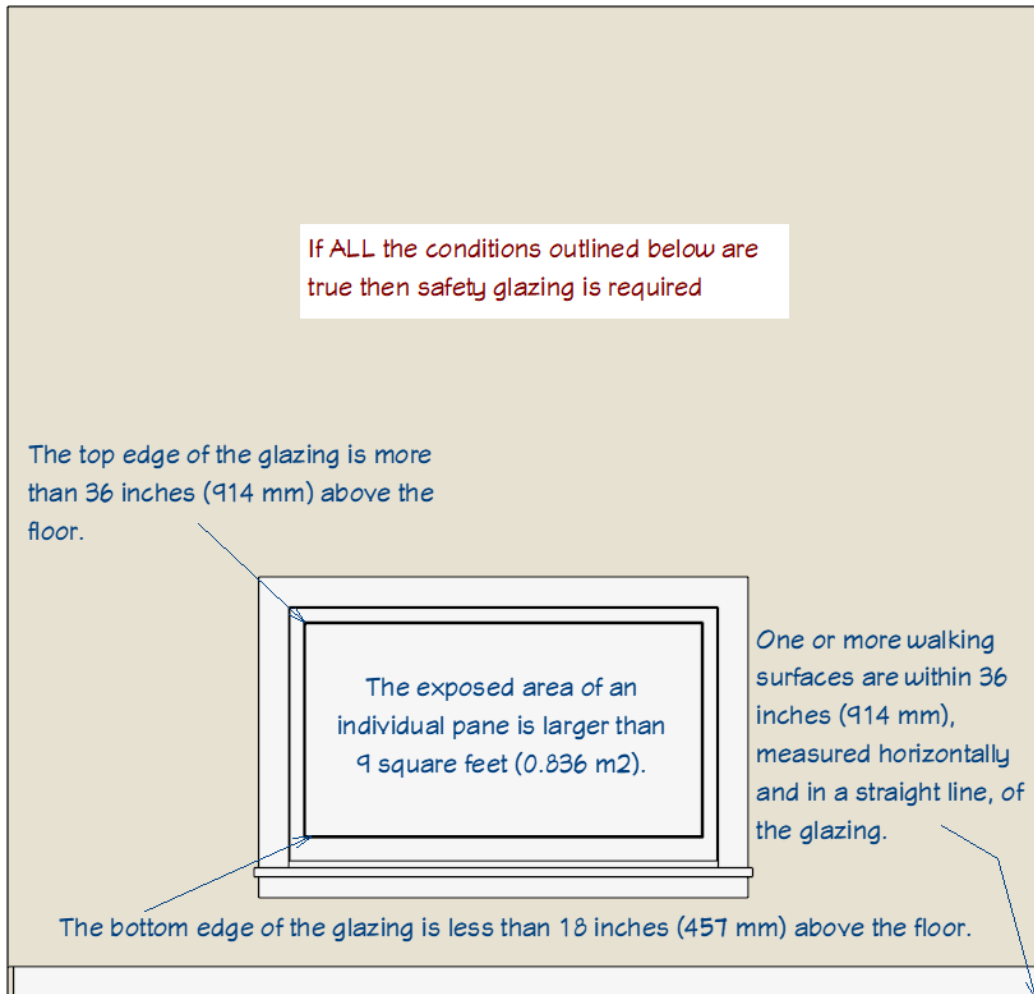

Exceptions

1. Decorative glazing.
2. Where glazing is adjacent to a walking surface and a horizontal rail is installed 34 to 38 inches (864 to 965 mm) above the walking surface. The rail shall be capable of withstanding a horizontal load of 50 pounds per linear foot (730 N/m) without contacting the glass and have a cross-sectional height of not less than 1 1/2 inches (38 mm).
3. Outboard panes in insulating glass units and other multiple glazed panels where the bottom edge of the glass is 25 feet (7620 mm) or more above grade, a roof, walking surfaces or other horizontal [within 45 degrees (0.79 rad) of horizontal] surface adjacent to the glass exterior.